

PHOTOCATALYTIC DEGRADATION OF VALSARTAN BY $\text{MoS}_2/\text{BiOCl}$ HETEROJUNCTIONS

E. Grilla ¹, A. Petala ^{1,*}, M.N. Kagiari ¹, Z. Frontistis ², D. Mantzavinos ¹

¹Department of Chemical Engineering, University of Patras, 26504, Patras, Greece

²Department of Chemical Engineering, University of Western Macedonia, Kozani, Greece


e-mail: anpetala@chemeng.upatras.gr

Scope

- Pharmaceuticals are designed to stimulate a physiological response in humans, animals, bacteria or other organisms.
- Semiconductor photocatalysis using solar irradiation as the source of photons for the activation of the catalyst has received considerable attention over the past few years.
- Bismuth-based materials have shown some promise in the photocatalytic degradation of organic dyes and pharmaceuticals, as under UV light irradiation BiOCl is a potential photocatalyst which may compete with TiO_2 , even though its band gap is larger than 3.2 eV.
- Molybdenum disulfide (MoS_2) is a silver black solid that is similar to graphite. Up to now, no report has discussed the preparation and properties of BiOCl combined with MoS_2 and their application in the degradation of pharmaceuticals.
- The effect of various operating conditions such as VLS and catalyst concentration, initial solution of pH, irradiation type (visible, UV) and water matrix has been examined.

Results

Catalyst Characterization

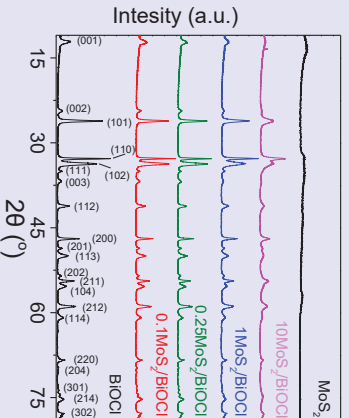


X-ray diffraction patterns of $\text{MoS}_2/\text{BiOCl}$ photocatalysts

Sample	SSA (m ² g ⁻¹)
MoS_2	5
10% $\text{MoS}_2/\text{BiOCl}$	38
1% $\text{MoS}_2/\text{BiOCl}$	27
0.25% $\text{MoS}_2/\text{BiOCl}$	20
0.1% $\text{MoS}_2/\text{BiOCl}$	18
BiOCl	21

Specific surface area, determined with the B.E.T. method.

From preliminary experiments the 0.25% $\text{MoS}_2/\text{BiOCl}$ photocatalyst showed higher efficiency for the degradation of valsartan than pure BiOCl. The enhanced photocatalytic activity over MoS_2 composites was mainly attributed to better electron-hole separation.

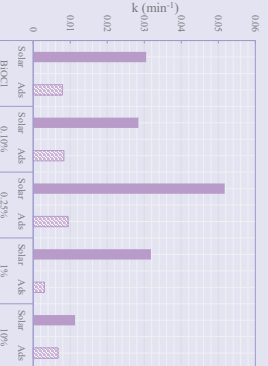


Difference between the activity of $\text{MoS}_2/\text{BiOCl}$ composites with different mass ratios under solar irradiation and adsorption


Conclusions

- Semiconductor photocatalysis based on $\text{MoS}_2/\text{BiOCl}$ is an efficient method for the degradation of VLS in aqueous solutions under solar radiation.
- Process performance was affected by several factors, such as irradiation time and type, catalyst concentration, VLS concentration, pH and water matrix. The optimum loading of $\text{MoS}_2/\text{BiOCl}$ was found to be 1000 mg/L.
- Complex interactions between the catalyst and the various inorganic and organic species present in aqueous matrices retard VLS degradation. VLS removal efficiency was higher at an inherent pH.
- >0.25% $\text{MoS}_2/\text{BiOCl}$ photocatalyst exhibits excellent stability as complete VLS removal takes place after the reuse of the same catalyst for four times.


Experimental

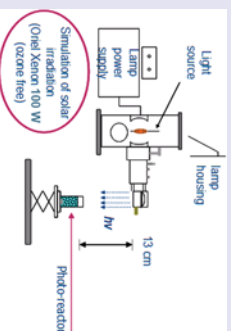


Photocatalytic Experiments

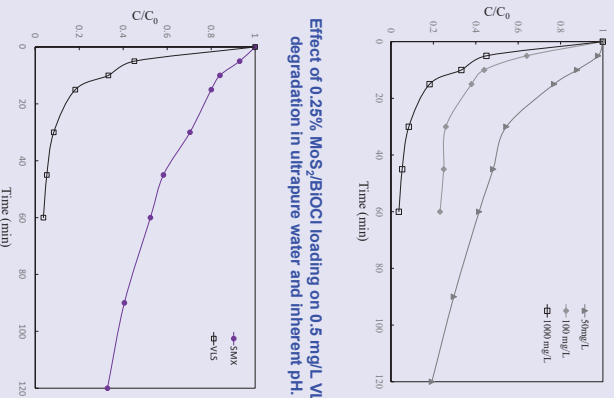

Effect of 0.25% $\text{MoS}_2/\text{BiOCl}$ loading on 0.5 mg/L VLS degradation in ultrapure water and inherent pH.

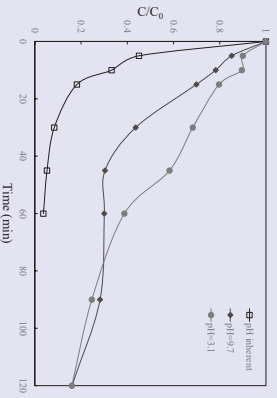

Effect of pH on 0.5 mg/L VLS degradation with the use of 1000 mg/L 0.25% $\text{MoS}_2/\text{BiOCl}$ in ultrapure water.

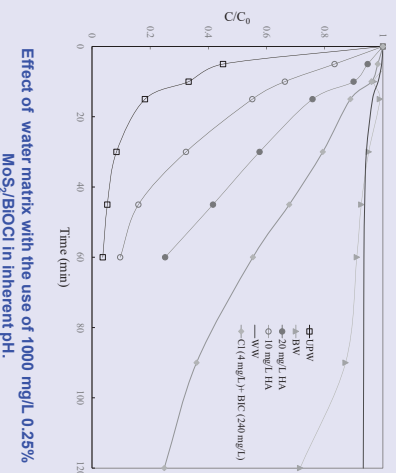

Effect of water matrix with the use of 1000 mg/L 0.25% $\text{MoS}_2/\text{BiOCl}$ in inherent pH.



ACKNOWLEDGMENTS

This research was funded by H.F.R.I., the Hellenic Foundation for Research and Innovation and General Secretariat for Research and Technology (GSRT). This work is part of the project 2704P-Development and Demonstration of a Photocatalytic Process for Removing Pathogen and Pharmaceutical Residues from Wastewater, funded by the Agency for Research Projects to Support Post-Doctoral Researchers* funded by H.F.R.I. Hellenic Foundation for Research and Innovation and General Secretariat for Research and Technology (GSRT).

Photocatalyst: $\text{MoS}_2/\text{BiOCl}$

Light source: Xe-arc lamp (Oriel LCS-100W)

V = 60 mL

HPLC Waters Alliance 2695 system

Waters 2996 PDA Detector 230 nm.


Kinetex XB-C18 100A column (2.6 μm , 2.1 mm \times 50 mm) & 0.5 μm inline filter

65:35 LPW:acetonitrile 0.2 mL/min and 45 $^\circ\text{C}$

VLS degradation is assumed to follow a pseudo-first order kinetic expression, according to Eqn. (1)

$$C_t = C_0 \exp(-kt) \quad (1)$$


where, k is the computed apparent constant rate, C_t and C_0 are referred to the VLS concentration at time t and zero, respectively.

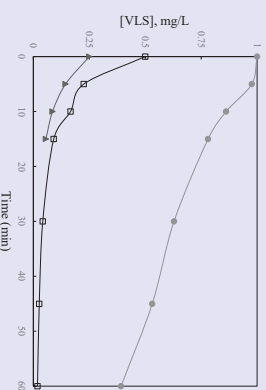


Effect of VLS concentration with the use of 1000 mg/L 0.25% $\text{MoS}_2/\text{BiOCl}$ in ultrapure water.

VLS (mg/L)	R ²
0.25	0.9968
0.5	0.9176
1	0.9932

Comparison of apparent constants rate of different VLS concentration with the use of 1000 mg/L 0.25% $\text{MoS}_2/\text{BiOCl}$ in ultrapure water.

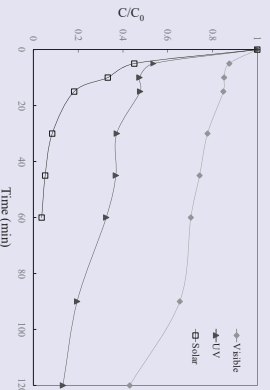

Effect of irradiation on 0.5 mg/L VLS degradation with the use of 1000 mg/L 0.25% $\text{MoS}_2/\text{BiOCl}$ in ultrapure water and inherent pH.

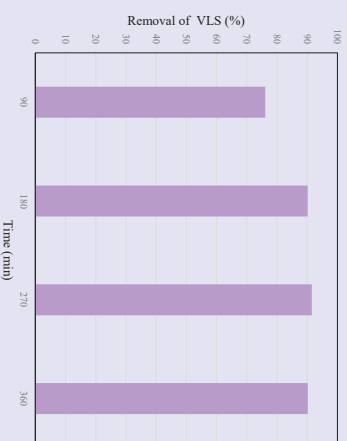

Removal of 0.5 mg/L VLS after 90 min of reaction for 4 consecutive runs with 1000 mg/L catalyst under solar irradiation.